


A DESIGN FOCUSING ON...

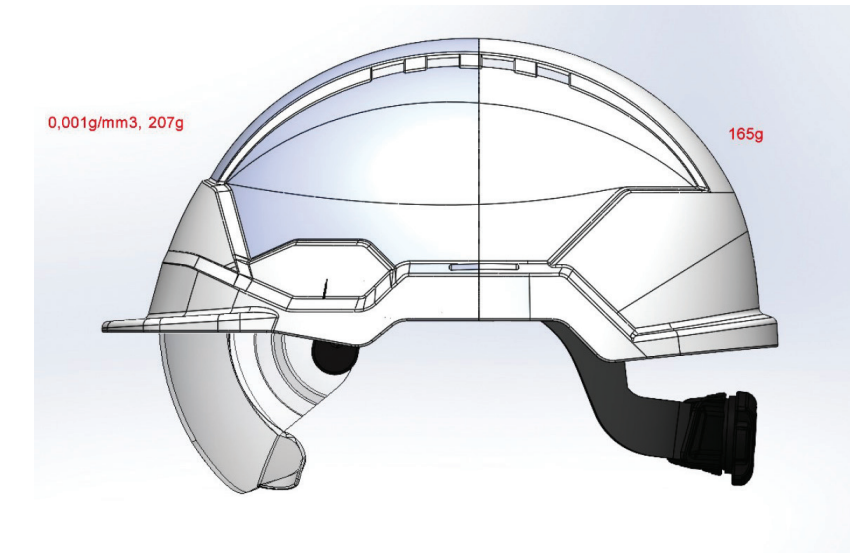

...comfort
Weight distribution (54% / 46%) has been studied to limit the pressure on muscles and reduce the feeling of weight / fatigue after a long wearing time.

... performance

ABS

High-performance raw materials that meet extreme applications (forest fires, technical rescues). High resistance to flame exposure, projections chemical liquids, molten metals.



Resistance to extremely cold temperatures




Resistance to lateral deformation
exposure to a force between 30 and 430N in steps of 100 Newton for 30 seconds




4-point chinstrap anchoring resistance
preventing suffocation

PHOENIX PRO



MM
Resistance to molten metal projection without deformation or flame emission after 5 seconds.



CLASSE 0
Electrical insulation for installations with a voltage up to 1000V a.c and 1500V d.c.

6 REFERENCES ADAPTED TO YOUR ACTIVITY

	SKU	Colours	Ocular features	Weight	Standards	Packing
PRO	6PHP200NSI	Blue	K N 8 9	450g	EN397:2012 A1:2012 EN50365:2002 EN1866:2001	1/16
	6PHP400NSI	White	K N 8 9	450g	EN397:2012 A1:2012 EN50365:2002 EN1866:2001	1/16
	6PHP160NSI	Yellow HV	K N 8 9	450g	EN397:2012 A1:2012 EN50365:2002 EN1866:2001	1/16
WIND	6PHW200NSI	Blue	K N 8 9	450g	EN397:2012 A1:2012 EN1866:2001	1/16
	6PHW400NSI	White	K N 8 9	450g	EN397:2012 A1:2012 EN1866:2001	1/16
	6PHW160NSI	Yellow HV	K N 8 9	450g	EN397:2012 A1:2012 EN1866:2001	1/16

SAFETY DESIGNER



Designer & supplier of personal protective equipments from head to toe

555 rue de la Dombes
01700 MIRIBEL - France

T +33 (0)4 72 26 23 23
F +33 (0)4 72 26 23 20

contact@coverguard-safety.com

coverguard-safety.com

SAFETY HELMET

PHOENIX








PHOENIX REALITY-PROOF

To answer a demand of daily protection from industrial risks, the Phoenix range has been designed to ensure comfort and performance


Available in PRO and WIND version

Phoenix marks an evolution of the Coverguard range and extends the field of applications.

Phoenix helmets are made in Europe for a guarantee of quality and a reliable lead time

 FARMING/FORESTRY PHOENIX WIND	 CONSTRUCTION PHOENIX WIND	 LIGHT INDUSTRY PHOENIX WIND PHOENIX PRO
 HEAVY INDUSTRY PHOENIX PRO	 ELECTRICAL ENVIRONMENT WITH LOW VOLTAGE INSTALLATIONS PHOENIX PRO	PPE CLASS II COMPLIANT WITH STANDARDS EN397, EN50365 (VERSION PRO ONLY) AND EN 1866

SCAN HERE TO WATCH THE PHOENIX RANGE VIDEO



6PHP

ABS LD MM 450g -30°C

PHOENIX PRO



SHELL INSULATION

- Compatibility in electrical environment
- Superior impact resistance

ABS SHELL

Quality design and impact resistance

FLAT FRONT SURFACE

Badge holder compatibility

SHORT PEAK

Clearance of the field of vision

4-POINT CHIN STRAP

Safety in use and stability of the helmet in the event of an impact

EAR MUFFS COMPATIBILITY

Connection for Coverguard ear muffs

INTEGRATED EYE PROTECTION

- Polycarbonate lens
- K standard anti-scratch treatment
- N standard anti-fog treatment
- Resistance to molten metal projection and hot solid (8)
- Electric arc resistance (9)

- Reinforced eye protection
- Impact performance and fog limitation

K N 8 9

3D TEXTILE BASANE

Evacuation of perspiration without accumulation for more comfort

6-POINT HARNESS IN TEXTILE AND LDPE BOWL

- Limitation of heat transfer
- Flexibility for more comfort

TIGHTENING BY DIAL

SIZE RANGE 51 TO 63 CM

- Ease of use
- Tightening precision for more comfort



6PHW

ABS LD 450g -30°C

PHOENIX WIND



DIRECT SIDE VENTILATION

- Good air circulation for more comfort
- Limitation of sweating

ABS SHELL

Quality design and impact resistance

FLAT FRONT SURFACE

Badge holder compatibility

SHORT PEAK

Clearance of the field of vision

4-POINT CHIN STRAP

Safety in use and stability of the helmet in the event of an impact

EAR MUFFS COMPATIBILITY

Connection for Coverguard ear muffs



A COMPLETE AND RELIABLE SOLUTION



Spare parts

SKU	Description	Features	Packing
6PHS00NSI	Textile sweatband	Cotton and 3D mesh Length: 21,5 cm	1/20
6PHSG00NSI	Safety glasses	K standard anti-scratch treatment N standard anti-fog treatment Resistance to molten metal projection and hot solid (8) Electric arc resistance (9)	1/20
6PHCS00NSI	4 points chin strap	Anchoring resistance between 150 and 250 newtons	1/20
6PHKS00NSI	High visibility sticker set		3/20

Compatible equipments

SKU	Description	Features	Standards	Packing
6POBA00NSI	Badge holder	Clear ABS Adhesive compatible Metal free		1/20
6MX3000NSI	Metal free earcups (30dB)	ABS Metal free PVC cushions Nylon adapter with POM adjustable arm	EN352-3:2002	1/20
6HCG170NSI	Cooling guard	Innovative moisture sensor fabric Anti slip band for higher stability		1/100
6HPAD00NSI	Cooling pad for helmet	Polymer microbeads that store freshness and restore it for several hours Easy to activate by immersion into fresh water Ease of use thanks to snap button fixation		1/200