
coverguard

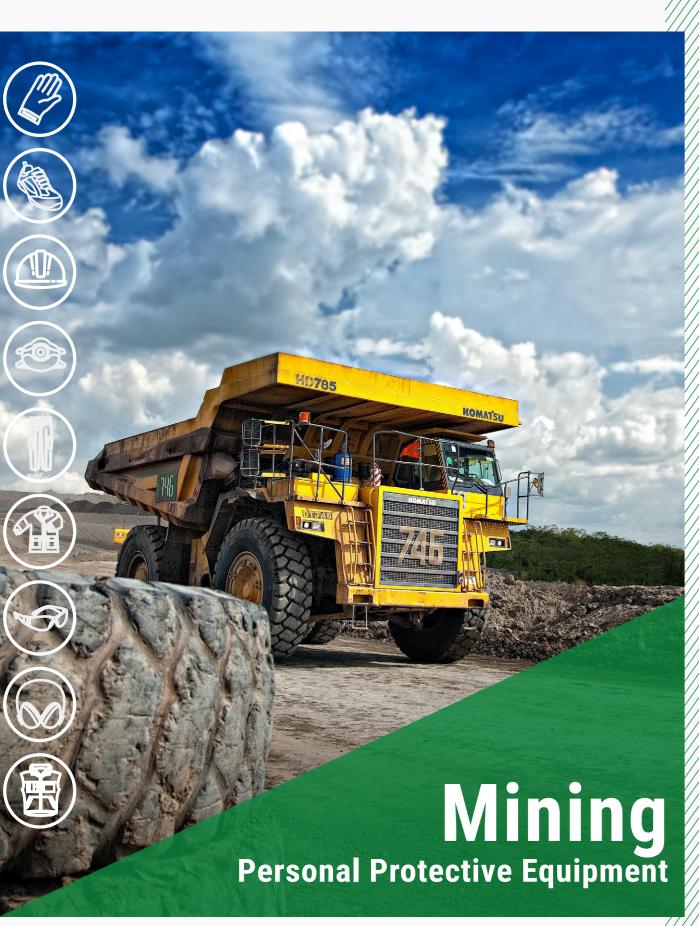

www.coverguard-safety.com

Follow our news on **Linked** in

COVERGUARD SALES:

Tel: +33 (0)4 72 26 59 60 555 rue de la Dombes 01700, MIRIBEL, France





HAND CE

M0152 EUROSTRONG

- Docker glove in grey split leather cowhide • Strong Red reinforced fabric cuff
- Artery Protector
- Safety cuff





M02240 EUROSTRONG

- Master glove in soft full grain goat leather Good value for money
- Full buffalo grain leather • Elastic wrist thightening
- Wing thumb
- Ocomfort, flexibility and extended service life

EUROCUT P500

Seamless knit with HPPF, mineral

Ontimized dexterity

Ourability (polyamide)

fibers, polyamide and molted grey





M02250 EUROSTRONG

- Artery protector





EUROCUT IMPACT 100

- hand and fingers
- Good grip in dry or slightly oily areas



ROCK











DEVON SAFETY

• Excellent grip thanks to an oil resistant

6G0E200NSI

● Electrical insulation EBT 440 Va

● Thermic Résistance : +50/-20°C

Adustable from 53cm to 62 cm.

♣ Lightweight = 356g

♠ Front Sweathand

O UV resistant

O Use by date: 60 month

- HDPE shell in high density polyethylene

 - 37cm sweatband side venting

 - Available in red, yellow, green, orange, blue

EARLINE 30213







9RELI

- **⊙** Excellent grip in greasy environment
- Anti-tear and wear-resistant uppe EN ISO 20345

PUROFORT® SAFETY

• Purofort® upper flexible and light for long

• Protection against the cold.

- ◆ Purofort® upper, reflective trim at the top◆ Purofort® / Vibram® XS Work outsole







9ALB200NSI

- O HDPE shell in high density polyethylene O Dielectric protection 1000AV / 1500VDC - Classe 0 /
- 6 points nylon web harness Adjusment with rachet from 53 to 62 cm • Fits with earcups 60750/ 60755 / 60757



 ϵ

trim at the back

Composite toe cap

O Nitrile rubber outsole

SILICON, FREE



EUROLITE 15N505

Grey polyamide seamles knit

protection against dermatitis risks

OFKO-TEX

3/4 double palm nitrile coating

Second skin sensation and increased skin

Excellent comfort and exceptional grip in

- - Resistance to hydrolysis (tested by CTC

 - Stainless Steel puncture resistant sole EN ISO 20345 • Textile and foam, removable insole
- Full grain leather upper with reflective
- Breathable 3D mesh lining Available with electrical hazard
- EN ISO 20345



- Full leather upper
 Shaped cleats: adherence and gripping on rough floors
 Grooves for liquid and mud dispersement
 Raised heel 1 cm and lateral edges: reinforced grip on







ϵ

- ◆ Close-fitting seal PU foam + soft PVC blue cord
- Cord (allows to keep earplugs around the neck when not used)
 PU foam + soft PVC blue cord



- PU foam without latex
- Reusable and washable
- Ocrd (allows to keep earplugs around the



and lightness

Output

Adjustable and comfortable headband



60440

EN 166 1SK

• Fits over prescription glasses

O Inclination adjustment

O Hard coated and anti-UV

• Flexible and self-adjustable temples

comfortale nasal cushions

• Elastic band latex free



Kevchain attachment

• Central closure with zip

6 external pockets

NAVY / PADDOCK

5NAC050 / 5PAC150

● 60% cotton / 40% Polyester - 245g/m²

High collar

• Multiple pockets

PROTECTION

BODY



PARTNER

8PACN

• Compatible with industrial laundry

Central zip under flap

An accessible price

100% cotton



8MASCO / 8MASCN

ASO

EN 11612 A1+B1+C1

Oil & Gaz industry

• Retro-reflective bands

SUNO

under the armpits)

Welding tasks

• ATEX Zone - Electrical industry

Antistatic protective clothing

O Clothing to protect against heat and flame

98% Cotton / 2% Antistatic - 220g/m²





HIKE

 ϵ

O Softness

Absorbent

100 % cotton - 220 g/m²

(85 % cotton & 15 % viscose)





EN 166 1FTK

₩ (€

60400 / 60403

• Fits over prescription glasses

O Upper and side protection

Hard coated and anti-UV

• Elastic band latex free

• Flexible and self-adjustable temples



60VEC00NSI

Overspectacles suitable with prescription glasses
 Panoramic lens with integrated side protection
 Adjustable temples graduate to soft



EN 20471 CLASS 2











Beam Distance

Drop Resistant

Light Duration



• Beam distances: 100m

EN 60529

EN 55015

EN 61547

TRIP

5TRI

100 % cotton - 150 g/m²

(85 % cotton & 15 % viscose)

CE

Softness

♠ Absorbent



 ATEX compatibility
 Visibility (fluorescent yellow)
 Convenient (anti-slip, adjustable angle)
 Reach + Rohs 2 lighting modes: Short range / Long range
 Beam distances: 75m (short) / 100m

5SAF

100 % cotton - 190 g/m²

(85 % cotton & 15 % viscose)

Polo collar

⊕ Softness

Absorbent

FN 61547