

Ref. 6GOE700

Non Vented Helmet General Use



356g

0%
METAL

The +

Lightweight
Dielectric 440V a.c.
UV resistant
Thermic resistance: +50 -20 °C
"Sponge and fabric" front sweatband
Adjustable from 53 to 62cm (2mm increments)

Front surface suitable for badge holder
Fits with earcups 60750 / 60755 / 60757 / 6MX3000NSI

DESCRIPTION

High density polyethylene shell
6 points polyethylene suspension harness
Not vented
Manual adjustment from 53 to 62cm,
27cm fabrics sweatband
UV resistant
Front surface suitable for badge holder (6POBA00NSI)
Fits with earcups 60750 / 60755 / 60757 / 6MX3000NSI
Suitable with Hi-Viz stickers 6STI000NSI

SECTORS

Heavy & process industries

Light Industries

Regional/public authorities

Infrastructure, building industry

APPLICATIONS

Construction site, building and public works, industry...

PURCHASE PACKAGING

Ref.	Size	Inner	Carton
6GOE700NSI	-		24


SALES PACKAGING

x1

Individual polybag

See also

VARIANTS

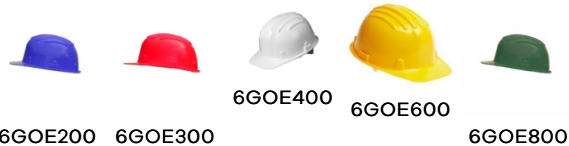

TECHNICAL FEATURES

Shape	Safety helmet	Features	HDPE shell high density polyethylene
Weight	356g		6 suspension point harness
Main risk	Prevention from falling objects and head injuries or head trauma		Size adjustment by slide from 53 to 62 cm (2mm increment)
Color	Orange	Other features	Electrical insulation EBT 440 va
			Electrical insulation EBT 440 Va
			Thermic Résistance : +50/-20°C
			Lightweight = 356g
			Use by date : 60 month
			Delivered assembled

STANDARD(S)

This equipment conforms to the personal protective equipment model covered by the EC type-examination certificate **DPI/0497/698**

Delivered by CSI (0497) Cascina Traversagna- 21 20030 Senago (MI) Italy



EPI CAT. II

EN397:2012 + A1:2012

Industrial safety helmets

RETAILER STAMP

MAJ 26/05/2023