


Self Retracting Lifelines

Personal SRL

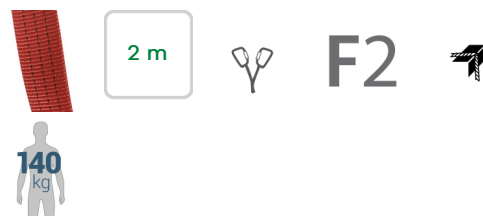

The +

- * Can be used in any direction
- * Can be connected at foot level
- * Tested on sharp edge

PURCHASE PACKAGING

Ref.	Carton
7TWIS10NSI	4

SALES PACKAGING



Individual box

APPLICATIONS

- * Construction, industry... areas with risks of falling on sharp edges
- * Replaces the double leg absorbing lanyard for 100% Tie-Off with the benefit of a reduced clearance distance
- * Connecting element in a fall arrest system

See also

VARIANTS



7PERS10

DESCRIPTION

Caract.	Can be used in fall factor 0, 1 and 2 Tested on sharp edge in accordance with VG 11.060 to secure areas near sharp edge (r>=0,5 mm).	Housing	Strong polymer housing with swivel eye and automatic steel karabiner
Other caract.	Clearance distance: 4 m	Lanyard	Technora 20 mm webbing 2m with 2 x 60 mm aluminium scaffold hooks
Weight	2,4 kg	Length	2 m
Service life	10 years	Force reduction	< 6 kN
		Capacity	User of 140 kg in factor 0, 100 kg in factor 1 and 100 kg in factor 2
		Breaking strength	>15 kN

STANDARD(S)

This equipment conforms to the personal protective equipment model covered by the EC type-examination certificate 2777/10834-01/E6-02
Delivered by SATRA Technology Europe Ltd (2777) Bracetown Business Park-Clonee- Dublin 15 Dublin Ireland



PPE Cat. III

EN360:2002

Retractable type fall arresters

VG 11 CNB/P/11.060